

Overview

HPE ProLiant DL560 Generation9 (Gen9)


Business-critical workloads and virtualized environments require compact and powerful computing capacity. The HPE ProLiant DL560 Gen9 Server is designed for exactly that. To deliver performance, scalability, and expandability in a dense 2U footprint. Deploy the ideal high-density four-socket server for multi-workload compute with the latest technology. It's designed to help you achieve greater performance at the right price.



Front View

- | | |
|---|---|
| 1. Quick removal access panel | 8. USB 3.0 connector |
| 2. Optional Optical drive. Requires Universal Media Bay | 9. Serial label pull tag |
| 3. Optional 2 SFF HDDs. Requires Universal Media bay. | 10. Systems Insight Display (SID) (optional) |
| 4. Power On/Standby button and system power LED button | 11. Bay 3 – fixed 8 SFF Drive Bay |
| 5. Health Status LED | 12. Bay 2 – Optional 8 SFF Drive Bay |
| 6. NIC Status LED | 13. Bay 1 – Optional 8 SFF Drive Bay or Universal Media Bay |
| 7. UID button | |

Overview

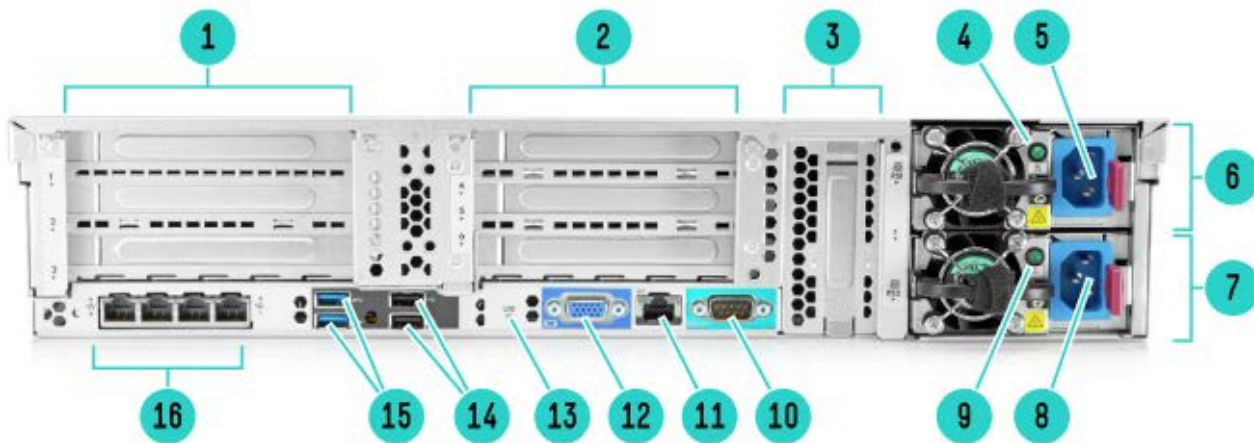

Rear View

- | | |
|---|---|
| 1. PCIe Slots (Slots 1-3 top to bottom) | 9. Power supply power LED |
| 2. PCIe Slots (Slots 4-6 top to bottom) | 10. Serial connector |
| 3. PCIe Slot (Slot 7) | 11. Dedicated iLO connector |
| 4. Power supply power LED | 12. VGA (video) connector |
| 5. Power supply power connection | 13. Unit ID LED |
| 6. HPE Common Slot Power Supply bay 1 | 14. USB 2.0 connectors (2) |
| 7. HPE Common Slot Power Supply bay 2 | 15. USB 3.0 connectors (3) |
| 8. Power supply power connection | 16. HPE FlexibleLOM ports
(Shown: 4x1GbE/Optional: 2x10GbE); port1 on right side |

What's New

- New HDD offering.

Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Processor Up to four of the following depending on model	Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
	E5-4669v3	2.1GHz	18	45MB	135W	9.6GT/s	2133
	E5-4667v3	2.0GHz	16	40MB	135W	9.6GT/s	2133
	E5-4660v3	2.1GHz	14	35MB	120W	9.6GT/s	2133
	E5-4655v3	2.9GHz	6	30MB	135W	9.6GT/s	2133
	E5-4650v3	2.1GHz	12	30MB	105W	9.6GT/s	2133
	E5-4640v3	1.9GHz	12	30MB	105W	8.0GT/s	1866
	E5-4627v3	2.6GHz	10	25MB	135W	8.0GT/s	2133
	E5-4620v3	2.0GHz	10	25MB	105W	8.0GT/s	1866
	E5-4610v3	1.7GHz	10	25MB	105W	6.4GT/s	1600

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Cache Memory

One of the following depending on model

45MB (1 x 45MB) Level 3 cache (E5-4669 v3)
 40MB (1 x 40MB) Level 3 cache (E5-4667 v3)
 35MB (1 x 35MB) Level 3 cache (E5-4660 v3)
 30MB (1 x 30MB) Level 3 cache (E5-4650 v3, E5-4640 v3, E5-4655 v3)
 25MB (1 x 25MB) Level 3 cache (E5-4620 v3, E5-4627 v3, E5-4610 v3)

Chipset

Intel® C610 Series Chipset
 Intel® Xeon® E5-4600v3 Processor Family

NOTE: For more information regarding Intel chipsets, please see the following URL:
<http://www.intel.com/products/server/chipsets/>

On System Management Chipset

HPE iLO (Firmware HPE iLO4 2.3) 4GB NAND

Memory

One of the following depending on model

Type:
 HPE SmartMemory
 DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)
 DIMM Slots Available 48 (12 DIMM slots per processor, 4 channels per processor, 3 DIMMs per channel)
 Maximum Capacity (LRDIMM) 1.5TB (48 x 32GB LRDIMM @2133MHz)
 Maximum Capacity (RDIMM) 1.5TB (48 x 32GB RDIMM @2133MHz)

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance

Standard Features

improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2133, 1866MHz, 1600MHz. Please see Memory Population Table below or the [Online Memory Configuration Tool](#).

NOTE: 64GB LRDIMM to be available in second half of 2015.

Memory Protection	Advanced ECC	Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
	Online spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.
	Mirroring mode	Memory mirroring inter-socket stores a copy of memory with dynamic failover in case of failure. Once a DIMM in a mirrored set is detected as failed, the mirror failover uses its mirrored DIMM.
	Demand and Patrol Scrubbing	Memory demand and patrol scrubbing prevent accumulation of correctable errors and reduces the likelihood of unplanned downtime.
	Failed DIMM Isolation	Failed DIMM isolation improves the service time thus improving the overall system availability.
	Data Bus ECC Protection	Data Bus ECC protection provides automatic correction from a single data bit error and detection of double data error bits. Often called single error correction/double error detection (SEC/DED).
	Memory Thermal Control	Memory thermal control is used to prevent DIMMs from overheating. Achieved by slowing down the memory access rate per the temperature monitored by DIMM sensor.
	Memory Mirroring Inter-Socket	Memory mirroring inter-socket stores a copy of memory with dynamic failover in case of failure. Once a DIMM in a mirrored set is detected as failed, the mirror failover uses its mirrored DIMM.

Network Controller The HPE ProLiant DL560 Gen9 servers offer a flexible network technology - FlexibleLOMs, which offers customers a choice of 1Gb, 10Gb, or 10Gb base-T Ethernet or converged networking in their embedded adapter. A range of NIC cards are also available to enhance networking capabilities.

NOTE: For additional details see the [Networking Section of this document](#).

Model	Adapter
Entry Model	HPE Ethernet 1Gb 4-port 331FLR Adapter
Base Model	HPE FlexFabric 10Gb 2P 533FLR-T Adapter
Performance Model	HPE FlexFabric 10Gb 2P 533FLR-T Adapter

Expansion Slots

Primary Riser (Standard)	Expansion Technology		Bus	Connector	Bus	Form Factor	Notes
	Slots #		Width	Width	Number		
	1	PCIe 3.0	x8	x16		Half Length/Full Height	Proc 1
	2	PCIe 3.0	x8	x16		Half Length/Full Height	Proc 1

Standard Features

3	PCIe 3.0	x8	x8	Half Length/Full Height	Proc 1
---	----------	----	----	-------------------------	--------

NOTE: PCIe slot availability is dependent on the number of processors installed.

NOTE: Connector Width indicates default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

NOTE: Bus Width indicates the number of physical electrical lanes running to the connector. Inserting cards with PCI bridges may alter the actual bus assignment number.

Secondary Riser (Optional)	Expansion Technology		Bus	Connector	Bus	Form Factor		Notes
	Slots #		Width	Width	Number			
	4	PCIe 3.0	x16	x16		Half Length/Full Height		Proc 2
	5	PCIe 3.0	x8	x16		Half Length/Full Height		Proc 2
	6	PCIe 3.0	x8	x8		Half Length/Full Height		Proc 2
Expansion Slot 7	Expansion Technology		Bus	Connector	Bus	Device	Form Factor	Notes
	Slots #		Width	Width	Number	Number		
	7	PCIe 3.0	x8	x16			Half Length/Full Height	Proc 2

Storage Controller One of the following depending on model	Entry Models	HPE Dynamic Smart Array B140i Controller
	Base Models	HPE Flexible Smart Array P440ar/2GB controller
	The P440ar Flexible Smart Array controller is in the Adaptive RAID on Chip slot, enables SAS drives and has 2GB Flash Backed Write Cache for data retention.	
	Performance Models	HPE Smart Array P840/4G Controller
	The P840 Flexible Smart Array controller enables SAS drives and has 4GB Flash Backed Write Cache for enhanced data retention.	

Internal Storage Devices One of the following depending on model	Hard Drives	None ship standard
	Hard Drive Bays	(8) Hot plug SFF SAS/SATA HDD bays in Entry and Base Models, (16) in Performance Models; upgradable to a maximum of (24) If one of the two Optional Universal Media Bay Kits is chosen, a maximum of (18) SFF drives are available as versus (24). The standard Universal Media Bay Kit occupies a (8) SFF drive bay cage and includes an optional Optical Disk Drive; another version has an optional 2SFF drive bay as well.
	Optional Optical Drive	Available via Universal Media Bay kit; with and without (2)SFF drive bay An optional optical drive can be added to either the Universal Media Bay Kit with 2SFF drive bay (793479-B21) or the Universal Media Bay Kit without 2SFF drive bay (795090-B21).

Maximum Internal Storage	CAPACITY	CONFIGURATION
Hot Plug SFF SATA	48TB	24 x 2TB
Hot Plug SFF SAS	48TB	24 x 2TB
Hot Plug SFF SATA SSD	38TB	24 x 1.6TB
Hot Plug SFF SAS SSD	92TB	24 x 3.84TB

Standard Features

Power Supply

One of the following depending on model

(1) HPE 1200W Common Slot Platinum Hot Plug Power Supply
NOTE: Entry Models have a single HPE 1200W Common Slot Platinum Hot Plug Power Supply.
(2) HPE 1200W Common Slot Platinum Plus Hot Plug Power Supplies
NOTE: Base and Performance Models have redundant HP1200W Common Slot Platinum Plus Hot Plug Power Supplies.

Common Slot Power Supplies

One of the following depending on power requirements:

HPE 1500W Common Slot Platinum Plus Hot Plug Power Supply
HPE 1500W Common Slot 48VDC Hot Plug Power Supply
HPE 1200W Common Slot Platinum Plus Hot Plug Power Supply
HPE 1200W Common Slot Platinum Hot Plug Power Supply

NOTE: 1500W power supply supports high line voltage only.

Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.

Hewlett Packard Enterprise Common Slot (CS) power supplies allow for commonality of power supplies across a wide range of ProLiant and Integrity servers, as well as HPE Storage solutions, and are designed to provide the highest power supply efficiency without degrading system performance. HPE CS power supplies are tested by the Electric Power Research Institute (EPRI) and certified through the ECOS 80 Plus power supply program. HPE CS power supply options provide efficiency ratings of up to 94% (80 Plus Platinum) and are available in several power output options including - 1200W, 1500W - allowing the customer to "right-size" a power supply for their specific server configuration. All HPE Common Slot power sources are UL, CE Mark Compliant, hot-plug and support redundant configurations.

HPE CS Platinum Plus power supplies are required when enabling Hewlett Packard Enterprise Intelligent Power Discovery (IPD) solution. IPD is the first technology to create an automated, energy-aware network between IT systems and facilities. This allows your company to reclaim millions of dollars in wasted power capacity and downtime costs across data centers. For more information on Hewlett Packard Enterprise IPD solution, go to <http://www.hp.com/go/ipd>.

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same output and efficiency rating. If non-matched power supplies are inserted you will get errors and operation will fail.

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

System Fans	Non-redundant	Redundant
6 Hot Plug Fans with N+1 redundancy		

Standard Features

Interfaces	Serial	1 rear
	Video	1 front (optional with Universal Media Bay kit); 1 rear
	iLO 4 Remote Management	1
	Micro SD dual Slot	1
	USB 2.0 Ports	5 total: 2 front (optional); 2 rear; 1 internal
	USB 3.0 Ports	4 total: 1 front; 2 rear, 1 internal

Operating Systems and Virtualization Software Support for ProLiant Servers	<u>Microsoft Windows Server</u>
	<u>Red Hat Enterprise Linux (RHEL)</u>
	<u>SUSE Linux Enterprise Server (SLES)</u>
	<u>VMware</u>
	NOTE: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page http://www.hp.com/support/DL560Gen9 .

Industry Standard Compliance	PCIe 3.0 Compliant
	ACPI 2.0. Compliant
	PXE Support
	WOL Support
	Microsoft® Logo certifications
	USB 2.0 Support
	USB 3.0 Support
	Energy Star
	ASHRAE A3/A4
	NOTE: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: http://www.hp.com/servers/ASHRAE .

Graphics	Integrated Matrox G200 video standard
	<ul style="list-style-type: none"> • 1280 x 1024 (32 bpp) • 1920 x 1200 (16 bpp)
	HPE iLO 4 On System Management Memory

	<ul style="list-style-type: none"> • 16 MB Flash • 256 MB DDR 3 with ECC (112 MB after ECC and video)
--	---

HPE Server UEFI/Legacy ROM	Legacy Mode or Unified Extensible Firmware Interface (UEFI) Mode
-----------------------------------	---

Hewlett Packard Enterprise ProLiant System BIOS is an EDK2 UEFI solution, and adheres to the latest revisions of UEFI Class 2 specifications which supports both legacy boot and UEFI boot operation. The HPE ProLiant DL580 Gen9 defaults to UEFI boot operation and can be factory or field configured for legacy boot operation.

Standard Features

NOTE: For UEFI boot operation, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: For more information on Hewlett Packard Enterprise ProLiant System BIOS and UEFI, see the UEFI Information Library: <http://www.hp.com/go/uefi/docs>

NOTE: HPE Legacy FIO Mode Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

To modify the server configuration ROM default settings, press F9 in the HPE ProLiant POST screen to enter the UEFI System Utilities screen. By default, the System Utilities menus are in the English language.

UEFI enables numerous new capabilities, including both industry standard functionality and features specific to HPE ProLiant servers. Following are some of the features that UEFI enables and that the HPE ProLiant DL580 Gen9 can support when configured for UEFI boot operation:

- Secure Boot - A new feature in which the system firmware, option card firmware, operating systems, and software collaborate to greatly enhance platform security.
- Operating system specific functionality - Microsoft Windows 2012 supports several features only when installed in UEFI mode.
- Support for > 2.2 TB (using GPT) boot drives - Such drives could previously only be used for boot drives when using RAID solutions such as HPE Smart Array.
- UEFI Shell - Provides a pre-boot environment for running scripts and tools. The HPE ProLiant UEFI Shell provides both standard capabilities as well as numerous enhancements.
- PXE boot support for IPv6 networks.
- PXE Multicast Boot allowing for faster PXE deployments for large numbers of servers.
- Boot support for option cards that only support a UEFI option ROM.

NOTE: When the server is configured for UEFI Boot Mode, PXE servers must be configured with a UEFI boot image.

When the server boots in UEFI mode, it does not boot media with a legacy OS installation. This includes DOS targets and Windows or Linux systems installed in Legacy mode. The reverse is also true for servers that boot in Legacy mode.

Form Factor

2U Rack Form Factor

Entry, Base and Performance pre-configured models ship with Gen9 Easy Install Rail Kits and Cable Management Assembly

3.44" (8.74 cm) Height x 17.54" (44.55 cm) Width x 29.5" (74.94 cm) Length

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hp.com/go/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hp.com/go/ProLiant/uefi>.

RESTful API

A single programmatic web interface that allows you to manage and monitor your server infrastructure using basic HTTP operations (GET, PUT, POST, DELETE and

Standard Features

PATCH). RESTful API for iLO 4 conforms to the Redfish 1.0 DMTF standard (iLO firmware version v2.30 or higher required for Redfish conformance). For more details visit: <http://www.hp.com/go/restfulapi>.

Intelligent Provisioning Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at <http://www.hp.com/go/intelligentprovisioning>.

Embedded Remote Support Hewlett Packard Enterprise embedded remote support, used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to HPE or an HPE Authorized Partner for automated phone home support. Learn more at <http://www.hp.com/go/insightonline/info>.

Server utilities	Smart Update	Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP). Learn more at http://www.hp.com/go/smartupdate .
	HPE Systems Insight Manager (HPE SIM)	HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with SUM to provide quick and seamless firmware updates. Learn more at http://www.hp.com/go/sim .
	Scripting Tool Kit and Windows PowerShell	Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at http://www.hp.com/go/ProLiantSTK or http://www.hp.com/go/powershell .
	RESTful Interface Tool	Scripting tool to provision servers using iLO 4 RESTful API to discover and deploy servers at scale. Learn more at http://www.hp.com/go/resttool .
	HPE iLO Mobile Application	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: http://www.hp.com/go/ilo/mobileapp .
	HPE Insight Online	HPE Insight Online, available at no additional cost as part of your HPE warranty, Care Pack or contractual support agreement with HPE, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at http://www.hp.com/go/insightonline/info .
	HPE OneView Standard	HPE OneView Standard can inventory, monitor, alert, and report on your G6, G7, Gen8, and Gen9 servers, while using the HPE OneView user interface. Annual support is optionally available. Learn more at http://www.hp.com/go/oneview .

Security	Power-on password
	Serial interface control
	Administrator's password
	Trusted Platform Module (TPM)

Warranty	This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year
-----------------	---

Standard Features

or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available

at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

Optional Features

Embedded Management	iLO Advanced	HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at http://www.hp.com/go/iloadvanced .
Server Management	HPE Insight Control	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol .
	HPE OneView	Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity, see http://www.hp.com/go/oneview
	HPE Insight Cluster Management Utility (CMU)	HPE Insight Cluster Management Utility is a hyperscale-optimized management framework that includes software for the provisioning, control, performance management and monitoring of groups of nodes and infrastructure. Learn more at http://www.hp.com/go/cmu .
Rack and Power Infrastructure	HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at HPE Rack and Power Infrastructure .	
High Performance Clusters	HPE Insight Cluster Management Utility (CMU)	HPE Insight Cluster Management Utility is a Hyperscale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at http://www.hp.com/go/cmu .
HPC Interconnects		
NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html .		
Storage Software	Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.	

Optional Features

Storage software that gets the job done:

- **Data Protection and Recovery Software**
Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**
Hewlett Packard Enterprise storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**
Hewlett Packard Enterprise storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**
Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**
With HPE StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.

NOTE: For more information available Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>.

Solutions

Factory Express Portfolio for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hp.com/SimplifiedConfig/Index>

Service and Support

Service and Support

HPE Technology Services for Industry Standard Servers

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HPE Care Pack Services

HPE Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

Optimized Care

Supports maintaining servers at optimum performance availability

HPE Proactive Care with 24x7 coverage, three year Care Pack Service

HPE Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HPE. This Care Pack Service combines three years' proactive reporting and advice with our highest level reactive coverage and enhanced escalation management, Hewlett Packard Enterprise 24x7, six hour call-to-repair hardware commitment. Hewlett Packard Enterprise is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. Service includes 24x7 collaborative software support for leading industry standard software running on your HPE ProLiant server.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

Standard Care Package

Supports maintaining high level of server availability

Foundation Care 24x7, three-year Care Pack Service

HPE Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HPE. This Care Pack Service combines three years' proactive reporting and advice with our 24x7 coverage and enhanced escalation management, four hour hardware response time and two hour call back for software questions on leading industry standard software running on your HPE ProLiant server. **[http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-](http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf)**

[8855ENW.pdf](http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf)

Related Services

HPE ProLiant Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. For more information on Factory Express

Service and Support

services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

Data Privacy Services

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware.

<http://www.hp.com/services/dataprivacy>

Additional HPE Care Pack services can be found at: <http://www.hp.com/go/cpc>

Connect your devices to HPE

Unlock all of the benefits of your technology investment by connecting your products to HPE. Achieve up to 77% reduction in down time, near 100% diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

HPE Support Center

Personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more <http://www.hp.com/go/hpsc>

Hewlett Packard Enterprise Support Center Mobile App** allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Care Pack or Hewlett Packard Enterprise contractual support agreement.

**** HPE Support Center Mobile App is subject to local availability**

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
2. Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HPE SFF Hard Drive Blank Kit or P/N 666986-B21: HPE LFF Hard Drive Blank Kit.

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

	Performance Models	Base Models
[SKU Number]	741066-B21	741065-B21
Model Name	HP ProLiant DL560 Gen9 E5-4640v3 4P 128GB-R P840/4GB 16SFF 2x1200W RPS Perf Server	HP ProLiant DL560 Gen9 E5-4620v3 2P 64GB-R P440ar/2GB 8SFF 2x1200W RPS Base Server
Processor	E5-4640v3	Intel® Xeon® E5-4620v3
Number of Processors	Four	Two
Memory	128GB (8x16GB Registered DIMMs, 2133 MHz)	64GB (4x16GB Registered DIMMs, 2133 MHz) NOTE: 24 DIMM slots available with Base Model; 2 more processor slots and 24 more DIMMs available via optional HPE ProLiant DL560 Gen9 CPU Mezzanine Board Kit (795107-B21).
Network Controller	HPE FlexFabric 10Gb 2P 533FLR-T Adapter	
Storage Controller	HPE Flexible Smart Array P840/4G Controller NOTE: Additional stand up Storage controllers also available as options.	HPE Flexible Smart Array P440ar/2GB NOTE: Additional stand up Storage controllers with up to 4GB FBWC available as options.
Hard Drive	None ship standard	
Internal Storage	16 SFF Drive Bays NOTE: Can be expanded up to a max of 24 SFF drives, with optional HPE ProLiant DL560 Gen9 Bay1 8SFF Cage/Backplane Kit (795085-B21). Alternatively, optional Universal Media	8 SFF Drive Bays NOTE: Can be expanded up to a max of 24 SFF drives, with optional HPE ProLiant DL560 Gen9 Bay2 8SFF Cage/Backplane Kit (795084-B21) and HPE ProLiant DL560 Gen9 Bay1 8SFF

Pre-configured Models

	Bay Kits may be chosen - with 2SFF drive bay (793479-B21) or without (795090-B21).	Cage/Backplane Kit (795085-B21). Alternatively, optional Universal Media Bay Kits may also be chosen for Bay1 - with 2SFF drive bay (793479-B21) or without (795090-B21).
Optical Drive Bay	Optional via Universal Media Bay	
Optical Drive	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay Kits (795090-B21 or 794379-B21)	
PCI-Express Slots	7 PCIe 3.0 slots available; Secondary Riser kit (793474-B21) installed	
Power Supply	(2) HPE 1200W Common Slot Platinum Plus Hot Plug Power Supplies	
Fans	6 hot plug fans, redundant	
Management	HPE OneView Advanced with iLO Advanced	Integrated Lights-Out 4 (iLO 4) ships standard
Energy Star	Meets Energy Star requirements	
Form Factor	Rack (2U), HPE Easy Install Rails with CMA	
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response	

	Entry Models
[SKU Number]	741064-B21
Model Name	HP ProLiant DL560 Gen9 E5-4610v3 2P 32GB-R B140i 8SFF SATA 1200W PS Entry Server
Processor	Intel® Xeon® E5-4610v3
Number of Processors	Two
Memory	32GB (2x16GB Registered DIMMs, 2133 MHz) NOTE: 24 DIMM slots available with Entry Model; 2 more processor slots and 24 more DIMMs available via optional HPE ProLiant DL560 Gen9 CPU Mezzanine Board Kit (795107-B21).
Network Controller	HPE Ethernet 1Gb 4P 331FLR Adapter
Storage Controller	HPE Dynamic Smart Array B140i NOTE: Additional Storage controllers including HPE Flexible Smart Array, HPE Smart Array and HPE Smart HBA also available as options, to enable both SAS capability as well as provide data retention with Flash Backed Write Cache (FBWC).
Hard Drive	None ship standard
Internal Storage	8 SFF Drive Bays NOTE: Can be expanded up to a max of 24 SFF drives, with optional HPE ProLiant DL560 Gen9 Bay2 8SFF Cage/Backplane Kit (795084-B21) and HPE ProLiant DL560 Gen9 Bay1 8SFF Cage/Backplane Kit (795085-B21). Alternatively, optional Universal Media Bay Kits may also be chosen for Bay1 - with 2SFF drive bay (793479-B21) or without (795090-B21).
Optical Drive Bay	Optional via Universal Media Bay
Optical Drive	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay Kits (795090-B21 or 794379-B21)

Pre-configured Models

PCI-Express Slots	3 PCIe 3.0 slots available; upgrade to 7 PCIe 3.0 slots would require optional Secondary Riser kit (793474-B21)
Power Supply	(1) HPE 1200W Common Slot Platinum Hot Plug Power Supply
Fans	6 hot plug fans, redundant
Management	Integrated Lights-Out 4 (iLO 4) ships standard
Energy Star	Meets Energy Star requirements
Form Factor	Rack (2U), HPE Easy Install Rails with CMA
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

Smart Buy Models

[SKU Number]	791050-S01	792872-S01
Model Name	HP ProLiant DL560 Gen9 E5-4627v3 2P 64GB-R P440ar/2G 533FLR-T 1200W RPS US Server/S-Buy	HP ProLiant DL560 Gen9 E5-4655v3 2P 64GB-R P440ar/2G 533FLR-T 1200W RPS US Server/S-Buy
Processor	Intel® Xeon® E5-4627v3	Intel® Xeon® E5-4655v3
Number of Processors	Two, upgradeable to four	
Memory	64GB (4x16GB Registered DIMMs, 2133 MHz) NOTE: 24 DIMM slots standard; 2 more processor sockets and 24 more DIMMs available via optional HPE ProLiant DL560 Gen9 CPU Mezzanine Board Kit (795107-B21).	
Network Controller	HPE FlexFabric 10Gb 2P 533FLR-T Adapter	
Storage Controller	HP Smart Array P440ar/2GB FBWC 12 Gbps SAS Controller NOTE: Additional Storage controllers also available as options.	
Hard Drive	None ship standard	
Internal Storage	Eight (8) SFF Drive Bays, upgradeable to ten (10), sixteen (16), eighteen (18), or twenty-four (24)	
Optical Drive Bay	Optional DVD-ROM (P/N: 726536-B21) or DVD-RW (P/N: 726537-B21) via Universal Media Bay Kits (P/N: 793474-B21)	
Optical Drive	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay Kits (795090-B21 or 794379-B21)	
PCI-Express Slots	Four (4) PCIe 3.0 I/O Expansion x8 slots (3 Full-Height, 1x Low Profile) One (1) x16 and three (3) x8 additional slots (6 Full-Height, 1x Low Profile total) with secondary Riser (P/N: 793474-B21)	
Power Supply	(2) HPE 1200W Common Slot Platinum Plus Hot Plug Power Supplies	
Fans	6 hot plug fans, redundant	
Management	Integrated Lights-Out 4 (iLO 4) ships standard	
Form Factor	Rack 2U (rail kit and cable management arm included)	
Warranty	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response	

Smart Buy Models

[SKU Number]	741891-S01	741050-S01
Model Name	HP ProLiant DL560 Gen9 E5-4667v3 2P 64GB-R P440ar/2G 533FLR-T 1200W RPS US Server/S-Buy	HP ProLiant DL560 Gen9 E5-4669v3 2P 64GB-R P440ar/2G 533FLR-T 1200W RPS US Server/S-Buy
Processor	Intel® Xeon® E5-4667v3	Intel® Xeon® E5-4669v3
Number of Processors	Two, upgradeable to four	
Memory	64GB (4x16GB Registered DIMMs, 2133 MHz) NOTE: 24 DIMM slots standard; 2 more processor sockets and 24 more DIMMs available via optional HPE ProLiant DL560 Gen9 CPU Mezzanine Board Kit (P/N: 795107-B21).	
Network Controller	HPE FlexFabric 10Gb 2P 533FLR-T Adapter	
Storage Controller	HP Smart Array P440ar/2GB FBWC 12 Gbps SAS Controller NOTE: Additional Storage controllers also available as options.	
Hard Drive	None ship standard	
Internal Storage	Eight (8) SFF Drive Bays, upgradeable to ten (10), sixteen (16), eighteen (18), or twenty-four (24)	
Optical Drive Bay	Optional DVD-ROM (P/N: 726536-B21) or DVD-RW (P/N: 726537-B21) via Universal Media Bay Kits (P/N: 793474-B21)	
Optical Drive	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay Kits (795090-B21 or 794379-B21)	
PCI-Express Slots	Four (4) PCIe 3.0 I/O Expansion x8 slots (3 Full-Height, 1x Low Profile) One (1) x16 and three (3) x8 additional slots (6 Full-Height, 1x Low Profile total) with secondary Riser (P/N: 793474-B21)	
Power Supply	(2) HPE 1200W Common Slot Platinum Plus Hot Plug Power Supplies	
Fans	6 hot plug fans, redundant	
Management	Integrated Lights-Out 4 (iLO 4) ships standard	
Form Factor	Rack 2U (rail kit and cable management arm included)	
Warranty	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response	

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

CTO Server	HP ProLiant DL560 Gen9 Configure-to-order Server
SKU Number	742657-B21
Processor	2U Server Chassis with 2 processor slots available; 4 processor configuration would require optional HPE ProLiant DL560 Gen9 CPU Mezzanine Board kit
DIMM Slots	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory
Storage Controller	HPE Dynamic Smart Array B140i
PCIe	4 PCIe 3.0 slots (all 4 available if second processor is chosen, which also enables +3 PCI 3.0 slots with optional Secondary Riser Kit upgrade)
Drive Cage	8SFF Hot Plug (Upgrades possible with +16SFF optional or +10 optional with optional Universal Media Bay Kits)
Network Controller	Flexible LOM slot (various options can be chosen for networking; NIC cards also available via expansion slots)
Fans	4 Hot Plug Fans (eight rotors with N+1 redundancy), front accessible
Management	HPE Integrated Lights-Out 4 (iLO4) standard management, HPE iLO4 Embedded Remote Support Technology HPE Insight Control Server Provisioning, HPE Insight Online, HPE Active Health System, System Insight Display
USB	(8) USB 2.0 ports (2 front, 4 rear, 2 internal)

(Base Configuration Continued)

Intel® C610 Chipset

(2) video ports (1 front optional via the Universal Media Kit upgrade option, 1 rear)

(1) dual microSD card slot

(1) Trusted Platform Module (TPM) connector

BIOS Legacy mode (field configurable) or Unified Extensible Firmware Interface (UEFI) mode (default)

Easy Install rails and cable management arm

NOTE: PCIe slot availability is dependent on the number of processors installed. Please refer to the "Expansion slots" section for more details.

NOTE: A minimum of two processors are required. The system may have three or four processors installed.

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Smart Buy Models

HPE Processors

Entry Processors - E5-4600v3 series Processors

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4610v3 (1.7GHz/10-core/25MB/105W) FIO Processor Kit 742704-L21

Base Processors - E5-4600v3 series Processors

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4620v3 (2.0GHz/10-core/25MB/105W) FIO Processor Kit 742702-L21

Performance Processors - E5-4600v3 series Processors

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4660v3 (2.1GHz/14-core/35MB/120W) FIO Processor Kit 742696-L21

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4660v3 (2.1GHz/12-core/30MB/105W) FIO Processor Kit 742698-L21

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4640v3 (1.9GHz/12-core/30MB/105W) FIO Processor Kit 742700-L21

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4627v3 (2.6GHz/10-core/25MB/135W) FIO Processor Kit 742706-L21

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4669v3 (2.1GHz/18-core/45MB/135W) FIO Processor Kit 742708-L21

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4655v3 (2.9GHz/6-core/30MB/135W) FIO Processor Kit 742710-L21

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4667v3 (2.0GHz/16-core/40MB/135W) FIO Processor Kit 789024-L21

NOTE: If more than one processor is desired select one xxxxxx-L21 and one or three corresponding xxxxxx-B21 processors. Mixing different processor models is not supported.

NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: For the Intel® C610 Chipset E5-4600 series, the letter preceding the model number indicates the Product Line (E5); 4600x v#, 4 = number of CPUs in a Node, 6 is socket/segment designation, 00= processor SKU, x = L for Low power SKUs and v3 = version number.

HPE Memory

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM, RDIMM, UDIMM, and HDIMMs are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM, RDIMM and UDIMMs.

NOTE: Select one or more HPE memory options from below.

Registered DIMMs (RDIMMs)

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726719-B21

HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 728629-B21

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit 759934-B21

Load Reduced DIMMs (LRDIMMs)

HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726724-B21

HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726722-B21

Smart Buy Models

HP 16GB (1x16GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit 726720-B21

NOTE: If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors, all DIMM slots are available.

NOTE: Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>.

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>.

HPE Power Supplies

NOTE: Select one or more power supplies.

NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.

NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.

NOTE: Option Kits contain the specified power supply and a PDU IEC cable.

NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HPE power cords please go to: <http://www.hp.com/products/powercords>.

HPE Common Slot Power Supply Kits

HP 1500W Common Slot Platinum Plus Hot Plug Power Supply Kit 684532-B21

NOTE: 94% efficiency with support for HPE Power Discovery Services.

NOTE: 1500W Common Slot Platinum Plus Hot Plug Power Supplies only support High Line Voltage.

HP 1500W Common Slot 48VDC Hot Plug Power Supply Kit 746708-B21

HP 1200W Common Slot Platinum Plus Hot Plug Power Supply Kit 656364-B21

NOTE: 94% efficiency with support for HPE Power Discovery Services.

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit 748287-B21

HPE FlexibleLOM

HP Ethernet 1GbE 4P 331FLR FIO Adapter 684208-B21

HP 1GbE 4-port 336FLR Adapter FIO Kit 684217-B21

HP 10GbE 2P 560FLR-SFP+ Adapter FIO Kit 684218-B21

HP Ethernet 10Gb 2P 561FLR-T FIO Adapter 700700-B21

HP FlexFabric 10Gb 534FLR-SFP+ FIO Adapter 700752-B21

HP FlexFabric 10Gb 2P 533FLR-T FIO Adapter 700760-B21

HP FlexFabric 10Gb 2P 556FLR-SFP+ FIO Adapter 732456-B21

HP Ethernet 10Gb 2P 546FLR-SFP+ FIO Adapter 779800-B21

NOTE: For 10Gb Adapters, a minimum of two Gigabytes (2GB) of server memory is required per adapter.

Step 3: Choose Additional Factory Integratable Options (only one from each category unless otherwise noted)

HPE Storage Controllers

SAS Controllers

HPE Smart Array Controllers

HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller 761872-B21

Smart Buy Models

	HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller	761874-B21
	HPE Flexible Smart Array Controllers	
	HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int FIO SAS Controller	749974-B21
	HPE Smart Host Bus Adapters	
	HP H240ar 12Gb 2-ports Int FIO Smart Host Bus Adapter	749976-B21
	HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter	761873-B21
BIOS Mode	HP Legacy FIO Mode Setting	758959-B22
	NOTE: Selecting this option will change the default UEFI BIOS setting into Legacy BIOS setting.	
Controller State	HP FIO Enable B140i Setting	784308-B21
	NOTE: If not selecting an HPE Storage Controller, this option may be selected to support RAID and Hot-plug capabilities for SATA hard drives. The B140i does not support SAS hard drives.	
	HP Mfg FIO Enable HBA Mode Setting	792962-B21
	NOTE: This option can only be selected with an HBA card and cannot be selected with HP Legacy FIO Mode Setting.	
HPE Insight Software	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
HPE Converged Infrastructure Management Software	HP OneView Advanced (with HP iLO Advanced)	
	HP OneView for ProLiant DL Server incl 3 yr 24x7 Supp FIO Bundle Physical 1 Svr Lic	E5Y43A
	HP OneView Advanced (without HP iLO Advanced)	
	HP OneView w/o iLO including 3 yr 24x7 Support FIO 1 Server LTU	P8B31A

Step 4: Choose Additional Options for Factory Integration from Core and Additional Options sections below.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options	HP ProLiant DL560 Gen9 CPU Mezzanine Board Kit	795107-B21
	NOTE: This kit is required if configured with 4 processors.	
	HP ProLiant DL560 Gen9 Bay2 8SFF Cage/Backplane Kit	795084-B21
	NOTE: This optional kit adds 8SFF drives for Bay2.	
	HP ProLiant DL560 Gen9 Bay1 8SFF Cage/Backplane Kit	795085-B21
	NOTE: This optional kit adds 8SFF drives for Bay2.	
	HP ProLiant DL560 Gen9 Universal Media Bay Kit	795090-B21
	NOTE: An optional Optical Disk Drive can be added, either DVD-ROM (726536-B21) or DVD-RW (72653-B21).	
	HP ProLiant DL560 Gen9 2SFF Universal Media Bay Kit	793479-B21
	NOTE: Universal Media Bay kit with a 2SFF drive bay; an optional Optical Disk Drive can be added, either DVD-ROM (726536-B21) or DVD-RW (72653-B21).	
	HP ProLiant DL560 Gen9 Bay3 to H240 Slot 7/ Bay 3 to P840/440 Riser1 and 2SFF-UMBay SAS Cable Kit	797924-B21
	NOTE: Required for connecting Bay1 UMB 2SFF to a P840/P440 controller, or if using controller H240 in slot7 attached to Bay3. Also needed if using controller P840/P440 in riser1 attached to Bay3.	
	HP ProLiant DL 560 Gen9 Bay 1 to Riser1/AROC and Bay 2/3 to Riser2/Slot7 SAS Cable Kit	797945-B21
	NOTE: Required if controllers H240/P440ar/H240ar/B140i in riser1/AROC (Smart Array HBA Connector) need to be connected to Bay1, or if controllers P840/P440 in Riser2/slot7 need to be connected to Bay2/3. Also needed if controller P440 in slot7 needs to be connected to Bay2/3.	
	HP ProLiant DL560 Gen9 Bay 2 to Riser1/AROC and Bay 2/3 to Riser1/2 SAS Cable Kit	797946-B21
	NOTE: Required if using controllers H240/P440ar/H240ar/B140i in riser1/AROC (Smart Array HBA Connector) which need to be connected to Bay2, or if using controllers P840/P440 in Riser1/2 which need to be connected to Bay2/3.	
	HP ProLiant DL560 Gen9 SAS Expander Card	804228-B21

HPE Processors	Entry Processors - E5-4600v3 series Processors	
	HP ProLiant DL560 Gen9 Intel® Xeon® E5-4610v3 (1.7GHz/10-core/25MB/105W) Processor Kit	742704-B21
	Base Processors - E5-4600v3 series Processors	
	HP ProLiant DL560 Gen9 Intel® Xeon® E5-4620v3 (2.0GHz/10-core/25MB/105W) Processor Kit	742702-B21
	Performance Processors - E5-4600v3 series Processors	
	HP ProLiant DL560 Gen9 Intel® Xeon® E5-4660v3 (2.1GHz/14-core/35MB/120W) Processor Kit	742696-B21

Core Options

HP ProLiant DL560 Gen9 Intel® Xeon® E5-4650v3 (2.1GHz/12-core/30MB/105W) Processor Kit	742698-B21
HP ProLiant DL560 Gen9 Intel® Xeon® E5-4640v3 (1.9GHz/12-core/30MB/105W) Processor Kit	742700-B21
HP ProLiant DL560 Gen9 Intel® Xeon® E5-4627v3 (2.6GHz/10-core/25MB/135W) Processor Kit	742706-B21
HP ProLiant DL560 Gen9 Intel® Xeon® E5-4669v3 (2.1GHz/18-core/45MB/135W) Processor Kit	742708-B21
HP ProLiant DL560 Gen9 Intel® Xeon® E5-4655v3 (2.9GHz/6-core/30MB/135W) Processor Kit	742710-B21
HP ProLiant DL560 Gen9 Intel® Xeon® E5-4667v3 (2.0GHz/16-core/40MB/135W) Processor Kit	789024-B21

HPE Memory

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM, RDIMM, UDIMM, and HDIMMs are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM, RDIMM and UDIMMs.

Registered DIMMs (RDIMMs)

HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21
HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21

Load Reduced DIMMs (LRDIMMs)

HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21
HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21

HPE Optical Drives

HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
--	------------

NOTE: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen9 Universal Media Bay kit: 795090-B21 or HPE ProLiant DL560 Gen9 2SFF Universal Media Bay kit: 793479-B21).

HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21
---	------------

NOTE: The optional Universal Media Bay Kits are required for this option. (HPE ProLiant DL560 Gen9 Universal Media Bay kit: 795090-B21 or HPE ProLiant DL560 Gen9 2SFF Universal Media Bay kit: 793479-B21).

HP Mobile USB Non Leaded System DVD RW Drive	701498-B21
--	------------

NOTE: External.

HPE Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be

Core Options

negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B21
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B21

12G SAS Hot Plug SFF (2.5-inch) Enterprise Drives

HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781516-B21
HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785067-B21

12G SAS Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State

HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762263-B21
HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762261-B21

12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives

HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765466-B21
HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive	791034-B21
HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765464-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive	748387-B21

12G SAS Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives

HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802586-B21
HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802582-B21
HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802578-B21

12G SAS Read Intensive Hot Plug SFF (2.5-inch) Solid State Drives

HP 1.92TB 12G SAS Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802891-B21
HPE 480GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816562-B21
HPE 3.84TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816576-B21
HPE 960GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816568-B21
HPE 1.92TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816572-B21
HPE 3.2TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822567-B21
HPE 1.6TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822563-B21
HPE 800GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822559-B21
HPE 400GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	822555-B21

NOTE: These drives support Gen8 servers and beyond only.

6G SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

Core Options

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive 718162-B21

HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652589-B21

HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652583-B21

HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652572-B21

HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652564-B21

HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 652605-B21

6G SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 652749-B21

HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 652745-B21

6G SAS ME Hot Plug SFF (2.5-inch) Enterprise Mainstream H2 Solid State Drives

HP 1.6TB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive 779176-B21

HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive 779172-B21

HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive 779168-B21

HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive 779164-B21

NOTE: Please see the [HPE SAS Hard Drives QuickSpecs](#) for Technical Specifications and additional information.

6G SATA Hot Plug SFF (2.5 inch) SC Midline Hard Drives

HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 655710-B21

HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive 655708-B21

6G SATA Hot Plug SFF (2.5-inch) SC 512e Drives

HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive 765455-B21

HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive 765453-B21

6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives

HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive 717965-B21

HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive 734360-B21

6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives

HP 1.6TB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive 757339-B21

HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive 717973-B21

HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive 739898-B21

HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive 717971-B21

Core Options

HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739888-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717969-B21
6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691868-B21
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691866-B21
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691864-B21
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691862-B21
6G SATA Value Endurance Hot Plug SFF (2.5-inch) SC Enterprise Value M1 Solid State Drives	
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764927-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764925-B21
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764923-B21
6G SATA Value Endurance Hot Plug SFF (2.5-inch) SC Enterprise Value G1 Solid State Drives	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive	756621-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive	756636-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid State Drive	756657-B21
6G SATA Light Endurance Hot Plug SFF (2.5-inch) SC Enterprise Light G1 Solid State Drives	
HP 960GB 6G SATA Light Endurance SFF 2.5-in SC Enterprise Light 3yr Wty G1 Solid State Drive	756601-B21
6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives	
HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	789145-B21
HP 240GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	789135-B21
HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804605-B21
HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804599-B21
HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804593-B21
HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804587-B21
HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804581-B21
HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804575-B21

Core Options

HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816929-B21
HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816919-B21
HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816909-B21
HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816899-B21
HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816879-B21
HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816889-B21

NOTE: Please see the [HPE Solid State Drives QuickSpecs](#) for Technical Specifications and additional information

6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives

HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804631-B21
HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804625-B21
HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	832414-B21
HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804613-B21
HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	817011-B21
HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816995-B21
HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816985-B21
HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816975-B21
HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816965-B21

6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives

HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804677-B21
HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804671-B21
HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804665-B21
HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804639-B21

HPE NVMe PCIe Read Intensive SFF (2.5 inch) Solid State Drives

HP 1.2TB NVMe PCIe Read Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764906-B21
HP 400GB NVMe PCIe Read Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764904-B21

HPE NVMe PCIe Mixed Use SFF(2.5-inch) Solid State Drives

HP 1.6TB NVMe PCIe Mixed Use SFF 2.5-in SC2 3yr Wty Solid State Drive	765038-B21
HP 800GB NVMe PCIe Mixed Use SFF 2.5-in SC2 3yr Wty Solid State Drive	765036-B21
HP 400GB NVMe PCIe Mixed Use SFF 2.5-in SC2 3yr Wty Solid State Drive	765034-B21

HPE NVMe PCIe Write Intensive SFF (2.5-inch) Solid State Drives

HP 1.6TB NVMe PCIe Write Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764892-B21
HP 800GB NVMe PCIe Write Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	736939-B21
HP 400GB NVMe PCIe Write Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	736936-B21

M.2 SSD

HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	777894-B21
HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	788028-B21

NOTE: M.2 drives go in PCIe slots and use B140i SATA controller only.

Hard Drive Blank Kits

HP Small Form Factor Hard Drive Blank Kit	666987-B21
---	------------

Core Options

Hard Drive Kits

HP ProLiant DL560 Gen9 Bay2 8SFF Cage/Backplane Kit	795084-B21
HP ProLiant DL560 Gen9 Bay1 8SFF Cage/Backplane Kit	795085-B21

NVMe Kit

HP DL560 Gen9 NVMe 6 Solid State Drive Express Bay Enablement Kit	774743-B21
---	------------

Media Bay Kits

HP ProLiant DL560 Gen9 Universal Media Bay Kit	795090-B21
HP ProLiant DL560 Gen9 2SFF Universal Media Bay Kit	793479-B21

NOTE: It includes a 2SFF Drive Bay.

HPE Networking

1 Gigabit Ethernet adapters

HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
HP Ethernet 1Gb 4-port 366T Adapter	811546-B21

10 Gigabit Ethernet adapters

HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HP Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21
HP Ethernet 10Gb 2-port 557SFP+ Adapter	788995-B21
HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
HP Ethernet 10Gb 2-port 561T Adapter	716591-B21

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

FlexibleLOM Adapters

HP Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HP FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HP Ethernet 10Gb 2-port 561FLR-T Adapter	700699-B21
HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter	779799-B21
HP FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter	727060-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>.

HPE InfiniBand

HP InfiniBand FDR 2-port 545QSFP Adapter	702211-B21
HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
HP InfiniBand QDR/Ethernet 10Gb 2-port 544+FLR-QSFP Adapter	764286-B21

Core Options

NOTE: Please see the [HPE InfiniBand Options for HPE ProLiant and Integrity Servers QuickSpecs](#) for additional information.

HPE I/O Expansion Options	HP ProLiant DL560 Gen9 Secondary 3 Slot Riser Kit	793474-B21
	HP ProLiant DL560 Gen9 Primary 2 Slot Riser Kit	793475-B21

NOTE: This is an optional kit which can be utilized when system is populated with at least two (2) processors.

HPE Power Supplies	HPE Common Slot Power Supply Kits	
	HP 1500W Common Slot Platinum Plus Hot Plug Power Supply Kit	684532-B21
	HP 1500W Common Slot 48VDC Hot Plug Power Supply Kit	746708-B21
	HP 1200W Common Slot Platinum Plus Hot Plug Power Supply Kit	656364-B21
	NOTE: 94% efficiency with support for HPE Power Discovery Services.	
	HP 1200W Common Slot Platinum Hot Plug Power Supply Kit	748287-B21
	NOTE: Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor .	
	NOTE: All power supplies in a server should match. Mixing Power Supplies is not supported.	
	NOTE: Option Kits contain the specified power supply and a PDU IEC cable.	
	NOTE: 1500W Power Supplies only support High Line Voltage.	
	NOTE: HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For a full list of optional HPE power cords please go to: http://www.hp.com/products/powercords .	

HPE Computation and Graphics Accelerators	HP NVIDIA Quadro K2200 Graphics Accelerator	J0G89A
--	---	--------

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Insight Software

HPE Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License C6N27A

HP Insight Control Server Provisioning Media Kit BD883A

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HPE Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the [HPE Insight Control QuickSpecs](#).

HPE Integrated Lights-Out (iLO) Advanced for ProLiant

HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License 512485-B21

HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates BD505A

HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU E6U59ABE

HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU E6U64ABE

NOTE: For additional license options please see the [HPE Integrated Lights-Out \(iLO\) QuickSpecs](#).

NOTE: For more information, visit: <http://www.hp.com/go/ilo>.

HPE Converged Infrastructure Management Software

HPE OneView Advanced (with HPE iLO Advanced)

HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic E5Y34A

HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU E5Y35AAE

HP OneView Media Kit Phys No Lic E5Y37A

HP Operations Analytics for HP OneView LTU K8G29A

HP Operations Analytics for HP OneView E-LTU K8G29AAE

HPE OneView Advanced (without HPE iLO Advanced)

HP OneView w/o iLO including 3yr 24x7 Support 1 Server LTU P8B24A

HP OneView w/o iLO including 3yr 24x7 Support Flex Quantity E-LTU P8B26AAE

NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.

NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of this software (USB flash drive).

NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/oneview>.

Additional Options

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

Please see the **HPE OneView QuickSpecs** for Technical Specifications and additional information.

High Performance Clusters	SUSE Linux Enterprise Server HPC Compute Node 1-2 Sockets 3 Year Subscription Flx LTU	M6K35A
	SUSE Linux Enterprise Server HPC Compute Node 1-2 Sockets 3 Year Subscription E-LTU	M6K35AAE
	SUSE Linux Enterprise Server HPC Head Node 1-2 Sockets 3 Year Subscription 24x7 Support Flx LTU	M6K36A
	SUSE Linux Enterprise Server HPC Head Node 1-2 Sockets 3 Year Subscription 24x7 Support E-LTU	M6K36AAE

HPE PCIe Workload Accelerator Options	Value Endurance (VE) PCIe Workload Accelerators	
	HP 6.4TB FH/HL Value Endurance (VE) PCIe Workload Accelerator	763840-B21
	HP 3.2TB HH/HL Value Endurance (VE) PCIe Workload Accelerator	763838-B21
	HP 1.6TB HH/HL Value Endurance (VE) PCIe Workload Accelerator	763836-B21
	HP 1.3TB HH/HL Value Endurance (VE) PCIe Workload Accelerator	763834-B21
	Light Endurance (LE) PCIe Workload Accelerators	
	HP 5.2TB FH/HL Light Endurance (LE) PCIe Workload Accelerator	775672-B21
	HP 2.6TB HH/HL Light Endurance (LE) PCIe Workload Accelerator	775670-B21
	HP 1.3TB HH/HL Light Endurance (LE) PCIe Workload Accelerator	775668-B21
	HP 1.0TB HH/HL Light Endurance (LE) PCIe Workload Accelerator	775666-B21
	NVMe PCIe Workload Accelerators	
	HPE 6.4TB Read Intensive-2 FH/HL PCIe Workload Accelerator	831739-B21
	HP 1.6TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803202-B21
	HP 1.6TB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803197-B21
	HP 2.0TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803204-B21
	HP 800GB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803200-B21
	HP 800GB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803195-B21

HPE Storage Controllers	SAS Controllers	
	HPE Smart Array Controllers	
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller	726821-B21
	HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller	726897-B21
	HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21
	HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller	726903-B21
	HPE Flexible Smart Array Controllers	
	HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller	726736-B21
	HPE Host Bus Adapter	
	HP H240ar 12Gb 2-ports Int Smart Host Bus Adapter	726757-B21
	HP H240 12Gb 2-ports Int Smart Host Bus Adapter	726907-B21
	HP H241 12Gb 2-ports Ext Smart Host Bus Adapter	726911-B21

Additional Options

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers	727258-B21
HP ProLiant DL560 Gen9 SAS Expander Card	804228-B21
HP ProLiant DL560 Gen9 Bay3 to H240 Slot 7/ Bay 3 to P840/440 Riser1 and 2SFF-UMBay SAS Cable Kit	797924-B21
HP ProLiant DL 560 Gen9 Bay 1 to Riser1/AROC and Bay 2/3 to Riser2/Slot7 SAS Cable Kit	797945-B21
HP ProLiant DL560 Gen9 Bay 2 to Riser1/AROC and Bay 2/3 to Riser1/2 SAS Cable Kit	797946-B21

HPE Tape Backup **NOTE:** For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HPE tape backup products see: <http://www.hp.com/storage/SPOCK> and <http://www.hp.com/go/ebs>.
NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kits as well.

Tape Autoloaders

HPE 1/8 G2 Tape Autoloader

HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	COH19A
HP StoreEver 1U SAS Rack-mount Kit	AE459B

HPE MSL2024 Tape Library

HP MSL2024 0-Drive Tape Library	AK379A
---------------------------------	--------

HPE MSL4048 Tape Library

HP MSL4048 0-Drive Tape Library	AK381A
HP Mini SAS High Density to 4-lane Mini SAS External Fanout 2 Meter Cable	K2R09A
HP Mini SAS High Density to 4-lane Mini SAS External Fanout 4 Meter Cable	K2R10A

HPE StoreEver MSL6480

HP StoreEver MSL6480 Scaleable Expansion Module	QU626A
HP StoreEver MSL6480 Scalable Base Module	QU625A

Tape Drives

HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive	EH848B
HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive	EH900B
HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B
HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B
HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount	EJ014B
HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit	EH946C
HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	COL99A
HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A
HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HPE StoreEver LTO-7 Ultrium 15000 Internal Tape Drive	BB873A
HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A

HPE Disk Backup HPE RDX Removable Disk Backup System

HP D3700 Enclosure	QW967A
HP D3600 Enclosure	QW968A

Additional Options

NOTE: For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HPE disk backup products see: <http://www.hp.com/storage/SPOCK>.

NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

HPE Storage Options

QLogic Fibre Channel HBAs

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A
HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter	QW971A
HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	QW972A

Emulex Fibre Channel HBAs

HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter	C8R38A
HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A

HPE Converged Network Adapters

HP StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A
HP StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A

HPE Disk Storage Systems

Disk Enclosures

HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W30A
HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31A
HP D6000 Dual I/O Module Disk Enclosure	QQ695A
HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697A
HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698A
HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ699A
HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ700A
HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB Bundle	M0T59A
HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 420TB Bundle	M0T57A
HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle	M0T58A

NOTE: Please see the [HPE D6000 Disk Enclosure QuickSpecs](#) for Technical Specifications and additional information.

HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
---	--------

NOTE: Please see the [HPE D2000 Disk Enclosures QuickSpecs](#) for Technical Specifications and additional information.

HPE Data Center Racks

HPE 11000 G2 Series Racks

HPE 11648 1075mm Pallet Universal Rack	H6J87A
HPE 11648 1075mm Shock Universal Rack	H6J88A
HPE 11642 1075mm Pallet Universal Rack	H6J65A
HPE 11642 1075mm Shock Universal Rack	H6J66A
HPE 11642 1200mm Pallet Universal Rack	H6J67A

Additional Options

HPE 11642 1200mm Shock Universal Rack	H6J68A
HPE 11636 1075mm Pallet Universal Rack	H6J77A
HPE 11636 1075mm Shock Universal Rack	H6J78A
HPE 11622 G2 1075mm Pallet Universal Rack	H6J83A
HPE 11622 G2 1075mm Shock Universal Rack	H6J84A
HPE 11614 1075mm Shock Universal Rack	H6J82A

NOTE: Please see the [HPE 11000 G2 Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Intelligent Series Rack

HPE 647 1075mm Pallet Intelligent Series Rack	BW911A
HPE 647 1075mm Shock Intelligent Series Rack	BW912A
HPE 647 1200mm Pallet Intelligent Series Rack	BW913A
HPE 647 1200mm Shock Intelligent Series Rack	BW914A
HPE 642 1075mm Pallet Intelligent Series Rack	BW903A
HPE 642 1075mm Shock Intelligent Series Rack	BW904A
HPE 642 1200mm Pallet Intelligent Series Rack	BW907A
HPE 642 1200mm Shock Intelligent Series Rack	BW908A
HPE 636 1075mm Pallet Intelligent Series Rack	BW895A
HPE 636 1075mm Shock Intelligent Series Rack	BW896A
HPE 842 1075mm Pallet Intelligent Series Rack	BW917A
HPE 842 1075mm Shock Intelligent Series Rack	BW918A

NOTE: Please see the [HPE Intelligent Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Value Series Rack

HPE V142 1075mm deep Pallet 100 series Rack	AF046A
---	--------

NOTE: Please see the [HPE Value Series Rack QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power Distribution Units (PDUs)

HPE Basic Power Distribution Unit (bPDU)

HPE Basic Power Distribution Unit: 1U/0U Version

HP 1.9kVA 120 Volt L5-20 Input (12xNEMA 5-20R) NA/JP Basic PDU	H5M54A
HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU	H5M56A
HP 2.8kVA 24A Low Voltage NA/JP Modular Power Distribution Unit	252663-D71
HP 4.9kVA 24A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D74
HP 8.3kVA 40A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D75
HP 8.6kVA 24A Three Phase NA/JP Modular Power Distribution Unit	AF512A
HP 14.4kVA 40A Three Phase NA/JP Modular Power Distribution Unit	AF519A
HP 17.3kVA 48A Three Phase NA/JP Modular Power Distribution Unit	AF511A

HPE Basic Power Distribution Unit: Half Height Version

HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU	H5M55A
HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU	H5M57A
HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU	H5M58A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU	H5M61A

HPE Basic Power Distribution Unit: Mid Height Version

HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU	H5M59A
---	--------

Additional Options

HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU	H5M60A
HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU	H5M75A
HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU	H5M63A
HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP Basic PDU	H5M64A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU	H5M62A

HPE Basic Power Distribution Unit: Full Height Version

HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU	H5M67A
--	--------

NOTE: Please see the **HPE Basic Power Distribution Units QuickSpecs** for information on additional options and product specifications.

NOTE: To learn more about HPE Basic Power Distribution Units (bPDU), please visit the HPE website at <http://www.hp.com/go/pdu>.

NOTE: Additional HPE Power Distribution Units are available. For a complete list of all HPE PDUs and additional information please visit: <http://www.hp.com/go/rackandpower>.

HPE Remote Monitoring Power Distribution Units (mPDU)

HPE Remote Monitored Power Distribution Unit: 1U Version

HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU	D9N43A
HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Monitored PDU	D9N46A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	D9N44A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	G9Z05A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Watertight Input (12xC13/12xC19) NA/JP Monitored PDU	G9Z07A

HPE Remote Monitored Power Distribution Unit: Half Height Version

HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU	D9N45A
---	--------

HPE Remote Monitored Power Distribution Unit: Mid Height Version

HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU	D9N47A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13/3xC19) NA/JP Monitored PDU	D9N51A
HP 5.7kVA 208 Volt L21-20 3-Phase Input (18xC13/3xNEMA 5-20R) NA/JP Monitored PDU	D9N52A
HP 8.6kVA 208 Volt L21-30 3-Phase Input (20xC13/3xC19/3xNEMA 5-20R) NA/JP Monitored PDU	D9N53A

HPE Remote Monitored Power Distribution Unit: Full Height Version

HP 8.3kVA 208 Volt CS8265C Input (30xC13/3xC19) NA Monitored PDU	D9N49A
HP 14.4kVA 208 Volt CS8365C 3-Phase Input (12xC13/12xC19)NA Monitored PDU	D9N58A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (30xC13/3xC19) NA Monitored PDU	D9N61A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (24xC13/3xC19) NA/JP Monitored PDU	D9N54A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU	D9N59A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (12xC13/12xC19) NA Monitored PDU	D9N62A
HP 19.9kVA 480 Volt 3-Phase (30 Outlet) NA Monitored PDU	D9N63A

HPE Environmental Sensor for Remote Monitored PDUs

Additional Options

HP Environmental Sensor for Remote Monitored and Managed PDUs E2D53A

NOTE: Please see the [HPE Monitored Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

HPE Intelligent Power Distribution Units (iPDU)

iPDU Core Units

HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit AF520A

HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit AF521A

HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit AF522A

HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit AF533A

HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit AF523A

HP 11.4kVA 16A 415V Three Phase L22-20 NA Core Intelligent Power Distribution Unit AF900A

HP 17.3kVA 24A 415V Three Phase IEC309 NA Core Intelligent Power Distribution Unit AF901A

HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit AF535A

HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit AF537A

NOTE: Please see the [HPE Intelligent Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

HPE Managed Power Distribution Units (maPDU)

HP 2.8kVA 120 Volt L5-30 Input (24x NEMA 5-20) NA/JP Managed PDU H8B48A

HP 3.6kVA 200-240 Volt Detachable C20 Input (7xC13/1xC19) WW Managed PDU H8B49A

HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Managed PDU H8B50A

HP 8.6kVA 208 Volt L15-30 3 Phase Input (18xC13/6xC19) NA/JP Managed PDU H8B52A

HP 8.6kVA 208 Volt L21-30 3 Phase Input (20xC13/3xC19/1x NEMA 5-20) NA/JP Managed PDU H8B53A

HP 14.4kVA 208V CS8365C 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU H8B55A

HP 17.3kVA 208V IEC309 60A 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU H8B56A

NOTE: Please see the [HPE Managed Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

iPDU Kits with Standard Extension Bars

HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit AF531A

HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit AF532A

iPDU Extension Bars

HP 5xC13 Intelligent PDU Extension Bar G2 Kit AF547A

HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar AF528A

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

HPE Rack Mount Consoles, KVM

HPE Location Discovery Services

HP Location Discovery Services LCD8500 Kit

TL052A

Additional Options

Switches, and Keyboards

HPE Rack Mount Consoles

HP LCD8500 1U US Rackmount Console Kit	AF630A
HP LCD8500 1U US TAA Rackmount Console Kit	AF645A

HPE KVM Switches

HP TAA 0x2x16 G3 KVM Console Switch	AF653A
HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP KVM Console USB Interface Adapter	AF628A
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A

HPE USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
--	------------

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/QuickSpecs/13972_na/13972_na.html

HPE Server Console Switches

HP 0x1x8 G3 KVM Console Switch	AF651A
HP 0x2x16 G3 KVM Console Switch	AF652A

HPE Server Console Switch G2 with Virtual Media & CAC

HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A

HPE IP Console Switch G2 with Virtual Media & CAC

HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/QuickSpecs/13474_na/13474_na.html

Rail Kits

NOTE: Gen9 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.

NOTE: Rail kits are optional for DL560 Gen9 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit.

NOTE: Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

NOTE: To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (p/n 695539-001).

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

HP 2U Large Form Factor Easy Install Rail Kit	733662-B21
---	------------

NOTE: Does not include CMA (733664-B21).

HP 2U Cable Management Arm for Easy Install Rail Kit	733664-B21
--	------------

HP 2U Large Form Factor Ball Bearing Rail Kit	720864-B21
---	------------

NOTE: Does not include CMA (720865-B21).

Additional Options

HP 2U Cable Management Arm for Ball Bearing Rail Kit 720865-B21

HPE Other Options

HP Rack LED Light Kit BW939A
 HP Kit LCD 1.83m Latch Display Port Cable G7T29A
 HP Advanced Power Manager Kit 741192-B21
 HP ConvergedSystem Door Branding Kit TK815A
 HP ConvergedSystem Rack Light Kit TK816A
 HP ConvergedSystem Rack Side Panel 1075mm Kit TK817A

HPE Uninterruptible HPE DirectFlow Three Phase UPS

Power Systems (UPS)

Power Unit (1U UPS)

HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System G9Y75A
 HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System AF478A

Input/Output Module Options for 1U UPS

HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module AF489A
 HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module AF491A
 HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module AF492A
 HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module G9Y76A
 HP DirectFlow UPS Management Card AF493A

Power Unit (2U UPS)

HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System AF479A

Input/Output Module Options for 2U UPS

HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module AF486A
 HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module AF487A
 HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module D9Q02A
 HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module AF484A

NOTE: All Input/Output Modules support dual output outlets except the AF484A.

Battery Pack Options

HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack AF480A
 HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack AF482A
 HP WW DirectFlow Secondary Battery Cable AF497A

NOTE: Please see the **HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs** for information on additional options and product specifications.

HPE Tower UPS

HPE T750 G4 UPS Models

HP T750 G4 NA/JP Uninterruptible Power System J2P85A

Additional Options

HPE T1000 G4 UPS Models

HP T1000 G4 NA/JP Uninterruptible Power System J2P86A

HPE T1500 G4 UPS Models

HP T1500 G4 NA/JP Uninterruptible Power System J2P87A

HPE Rack/Tower UPS

HPE R/T2200 G4 UPS Models

HP R/T2200 G4 NA/JP Uninterruptible Power System J2R00A

HPE R/T3000 G4 UPS Models

HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System J2R01A

HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System J2R02A

R1500 G4 Models

HP R1500 G4 NA Uninterruptible Power System J2Q99A

R7000 Uninterruptible Power System (UPS)

HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A

R5000 Uninterruptible Power System (UPS)

HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System AF460A

HPE UPS Options

HP R/T2200 G4 Extended Runtime Module J2R09A

HP R/T3000 G4 Extended Runtime Module J2R10A

HP 2U Rack/Tower UPS Shipping Kit L4Q11A

NOTE: Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on additional options and product specifications.

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

HPE Power Cords

HP C13 - Nema 6-15P US 250V 15A JP 3.6m Power Cord A0N33A

HP C13 - Nema 5-15P US/CA 110V 10Amp 1.83m Power Cord AF556A

HP 8AWG W/Ground Lug 48V DC 3.0m Power Cord J6X42A

HPE USB and SD Options

HPE Flash Media Kits for USB Drives

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HP 32GB microSD Enterprise Mainstream Flash Media Kit 700139-B21

HP 8GB microSD Enterprise Mainstream Flash Media Kit 726116-B21

HP Dual 8GB microSD Enterprise Midline USB Kit 741279-B21

NOTE: Please see the [HPE Flash Media Kits QuickSpecs](#) for additional information.

HPE Care Pack Services

Proactive Care

HP 3 year 24x7 DL560 Gen9 Proactive Care Service U8QM3E

HP 3 year 24x7 with Defective Media Retention DL560 Gen9 Proactive Care Service U8QM4E

HP 3 year Call to Repair DL560 Gen9 Proactive Care Service U8QM9E

HP 3 year Call to Repair with Defective Media Retention DL560 Gen9 Proactive Care Service U8QN0E

Additional Options

HP 3 year 24x7 w/Comprehensive Defective Material Retention DL560 Gen9 Proactive Care Service	U8QS3E
HP 3 year Call to Repair w/ComprehensiveDefectiveMaterialRetention DL560 Gen9 Proactive Care Service	U8QS6E
HP 3 year 24x7 DL560 Gen9 with OneView Proactive Care Service	U8QW0E
HP 3 year 24x7 with Defective Media Retention DL560 Gen9 with OneView Proactive Care Service	U8QW1E
HP 3 year Call to Repair DL560 Gen9 with OneView Proactive Care Service	U8QW6E
HP 3 year Call to Repair w/Defective Media Retention DL560 Gen9 with OneView Proactive Care Service	U8QW7E
HP 3 year 24x7 w/Comprehensive Defective Material Retention DL560 Gen9 w/OneView Proactive Care SVC	U8RB0E
HP 3 year Call to Repair wComprehensiveDefectiveMaterialRetention DL560 Gen9 w OV Proactive Care SVC	U8RB3E

Installation & Start-up Services

HP Install ProLiant DL560 Service	U6H58E
HP Startup ProLiant DL560 Service	U6H60E

NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.

NOTE: For more information, customer/resellers can contact: <http://www.hp.com/services/carepack>.


Memory

HPE SmartMemory

New HPE SmartMemory now provides additional protection for your servers. With HPE Authentication it can verify that you have true HPE Quality components. Your server can take advantage of additional Gen9 enhancements in performance, durability and future manageability support through HPE Active iLO.

For detailed memory configuration rules and guidelines, please use the [Online DDR4 Memory Configuration Tool](#).

Memory
Population
guidelines

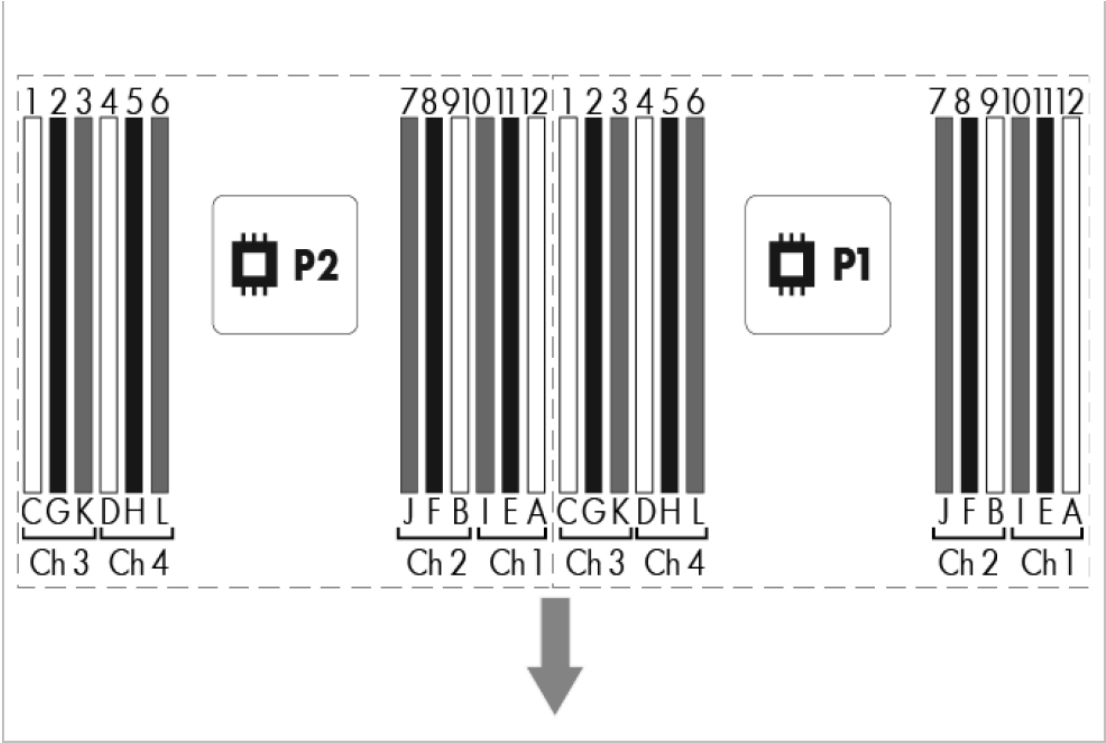

DIMM population order											
1st slot of channel				2nd slot of channel				3rd slot of channel			
A	B	C	D	E	F	G	H	I	J	K	L
Number of DIMMs to install				4				8			

General Memory Population Rules and Guidelines:

- To maximize performance, install two memory cartridges per processor and balance the total memory capacity between all installed processors.
- When multiple processors are installed, Hewlett Packard Enterprise recommends installing the DIMMs in sequential alphabetical order: 4A, 9B, 1C, 12D, and so on.
- LRDIMMs support higher densities than single- and dual-rank RDIMMs, and higher speeds than quad-rank RDIMMs. This support enables you to install more high capacity DIMMs, resulting in higher system capacities and higher bandwidth.
- Do not mix LRDIMMs with any other DIMM type (RDIMM, LVDIMM).

Memory

- RDIMM population is limited to a maximum of eight logical ranks per channel. Therefore, only two quad rank RDIMMs are supported per channel. If there are more than eight physical ranks per channel, LRDIMMs rank multiplication provides support for three DIMMs per channel.
- Lockstep mode requires specific population requirements. See lock-step configuration below for more information.

NOTE: UDIMMs are not supported. This server does not support mixing LRDIMMs, RDIMMs, or UDIMMs. Attempting to mix any combination of these DIMMs can cause the server to halt during BIOS initialization. For detailed memory configuration rules and guidelines, use the Online DDR4 Memory Configuration Tool on the HPE website (<http://www.hp.com/go/ddr3memory-configurator>).

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-4600v3 Series Processor Family

Memory Bandwidth and Capacity							
[DIMM Type]	Registered DIMMs (RDIMMs)				Load Reduced (LRDIMMs)		
DIMM Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank	Dual Rank	Quad Rank	Quad Rank
DIMM Capacity	8GB	8GB	16GB	32GB	16GB	32GB	64GB
DIMM Native Speed (MT/s)	2133	2133	2133	2133	2133	2133	2133
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
SLOTS THAT CAN BE POPULATED							
48 slot servers	48	48	48	48	48	48	48
MAXIMUM CAPACITY (GB)							
	384	384	768	1536	768	1536	3072
POPULATED DIMM SPEED (MT/s)							
1 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
3 DIMM Per Channel	1600	1600	1600	1600	1866	1866	1866

Memory Speed by Processor Model	Processor Models	Supported Memory Speeds
	E5-4660v3, E5-4650v3, E5-4627v3, E5-4669v3, E5-4655v3, E5-4667v3	2133/1866/1600MHz
	E5-4620v3, E5-4640v3	1866/1600MHz
	E5-4610v3	1600MHz


Memory

Standard and Maximum Memory Capacity (Pre-configured Models)	Pre-Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
	E5-4640v3	128GB (8x16GB)	2688GB (40x64GB, 8x16GB)	3072GB (48x64GB)
	E5-4620v3	64GB (4x16GB)	2880GB (44x64GB, 4x16GB)	3072GB (48x64GB)
	E5-4610v3	32GB (2x16GB)	2976GB (46x64GB, 2x16GB)	3072GB (48x64GB)

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.


- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

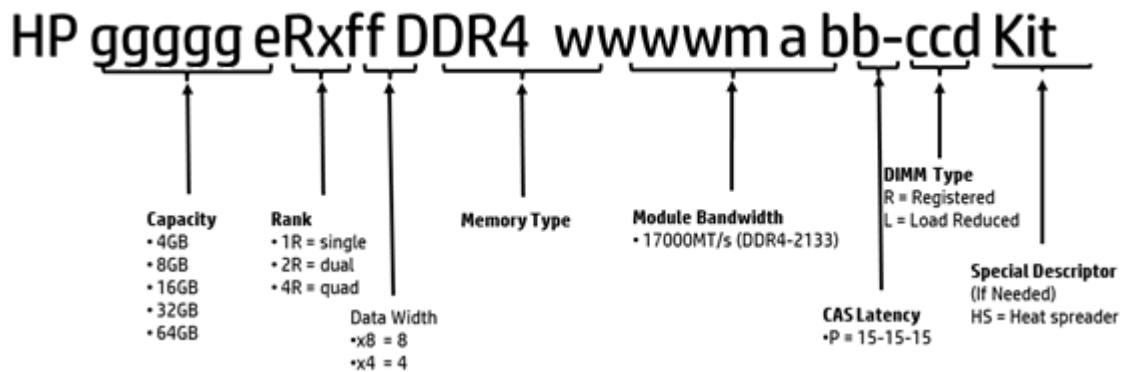

Storage

8 SFF (+2 SFF) hot-plug drive model with Universal Media Bay 1-8

8 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays




1-2

2 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays
Universal Media Bay Kit with 2xSFF drives

16 SFF (+2 SFF) hot-plug drive model with Universal Media Bay 1-16

16 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays



1-2

NOTE: If Universal Media Bay Kit is not chosen, even Bay 1 can be populated with 8xSFF drives to give a maximum of 24xSFF drives
2 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays
Universal Media Bay Kit with 2xSFF drives

Technical Specifications

System Unit	Dimensions (H x W x D) (with bezel)	6.88" x 17.48" x 29" (17.5cm x 44.4cm x 73.6cm)	
	Weight (approximate)	Maximum:	116.56 lb (52.87 kg)
		(all hard drives, power supplies, DIMMs and processors installed)	
		Minimum:	70.94 lb (32.18 kg)
		(one hard drive, two power supplies, four DIMMs, and two processors installed)	
	Input Requirements (per power supply)	Range Line Voltage	100 - 120 VAC (1200W PS only) 200 - 240 VAC (1200W & 1500W PS)
		Rated Input Current	9.2A (100 VAC), 6.6A (200 VAC) - 1200W PS 8.3A (200 VAC) - 1500W PS
		Rated Input Frequency	50 to 60 Hz
		Rated Input Power	1000 W (120 VAC), 1320 W (230VAC)- 1200W PS 1652 W (at 230 VAC) - 1500W PS
	BTU Rating	Maximum	3408 BTU/hr (120 VAC), 4500 BTU/hr (at 230 VAC) - 1200W PS 5637 BTU/hr (230 VAC) - 1500W PS VAC), 3112 BTU/hr (at 240 VAC) for China Only
	Power Supply Output (per power supply)	Rated Steady-State Power	For 1400W Power Supply: 1400W (at 100 VAC), 1400W (at 240 VAC), 1400W (at 240 VAC) For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only
		Maximum Peak Power	For 1400W Power Supply: 1400W (at 100 to 127 VAC), 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only
		NOTE: To review typical system power ratings use the HPE Power Advisor which is available online located at url: http://www.hp.com/go/proliant-energy-efficient or http://www.hp.com/go/hppoweradvisor .	

Technical Specifications

System Inlet Temperature	Standard	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae
	Extended Ambient	For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/Ashrae
	Operating Support	System performance may be reduced if operating in the extended ambient operating range or with a fan fault.
Relative Humidity (non-condensing)	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	10% to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
Altitude	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Operating	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
Idle		
L WAd		6.8 B
L pAm		51.2
Operating		
L WAd		6.9 B

Technical Specifications

L pAm 51.2

Emissions	FCC Rating	Class A
Classification	Normative	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003;
(EMC)	Standards	CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HPE Dynamic Smart Array B140i Controller	Number of PCI links	Four
	PCI link rate	4 Gb/s
	Storage protocol support	SATA
	SAS/SATA peak data transfer rate	6 Gb/s
	Number of SAS/SATA links	10 links
	SAS/SATA connectivity	2x4 connectors; 2x1 connectors
	Expander support	No
	Drives supported (max)	Up to 10 Internal Drives
	RAID support	0, 1, 10, 5 SATA
	Software management	HPE SSA, SMH, SIM
	Warranty	Server warranty
	HPE Secure Encryption license	Not Supported
	HPE SmartCache License	Not Supported
	HPE Smart Storage Administrator	Supported

HPE Ethernet 1Gb 4-port 331FLR Adapter	Network Interface	10Base-T/100Base-TX/1000Base-TX
	Compatibility	IEEE 802.3 10Base-T
		IEEE 802.3ab 1000Base-T
		IEEE 802.3u 100Base-TX
		IEEE 802.3x

Technical Specifications

		IEEE 802.3ad 1000Base-TX
		IEEE 802.3az
		IEEE 1588
		802.1as
		IEEE 802.1as
	Ports	
	Data Transfer Method	PCI-Express 2.0 x4
Environment-friendly Products and Approach	End-of-life Management and Recycling	<p>Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HEWLETT PACKARD ENTERPRISE OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.</p>

Summary of Changes

Date	Version History	Action	Description of Change
01-Dec-2015	From Version 4 to 5	Added	New HDD offering was added to HPE Drives. New option added to HPE Disk Storage Systems.
		Changed	On System Management Chipset, Maximum Internal Storage, Embedded Management, and Server utilities were revised. Product images were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Sep-2015	From Version 3 to 4	Added	Added new 6Gb SATA Solid State Drives. Added new HP OneView management software.
		Changed	Maximum Internal Storage, Interfaces, and HP Memory were revised.
17-Aug-2015	From Version 2 to 3	Added	New Hard Drives offering was added to Core Options. HP Computation and Graphics Accelerators was added to Core Options.
		Changed	Memory and Expansion Slots under Standard Features section were revised. Core Options, Memory, and Storage sections were revised.
26-Jun-2015	From Version 1 to 2	Changed	Interfaces entry under Standard Features section was revised. Base configuration under Configuration Information - Factory Integrated Models section (Step 1) was revised.



hp.com/qref/dl560gen9



Sign up for updates

★ Rate this document

Summary of Changes

© Copyright 2015 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c04601216 - - North America - V5 - 1-December-2015



**Hewlett Packard
Enterprise**